




Trucks for life  
**ISUZU**

# **C&E SERIES**

Isuzu The World's Choice

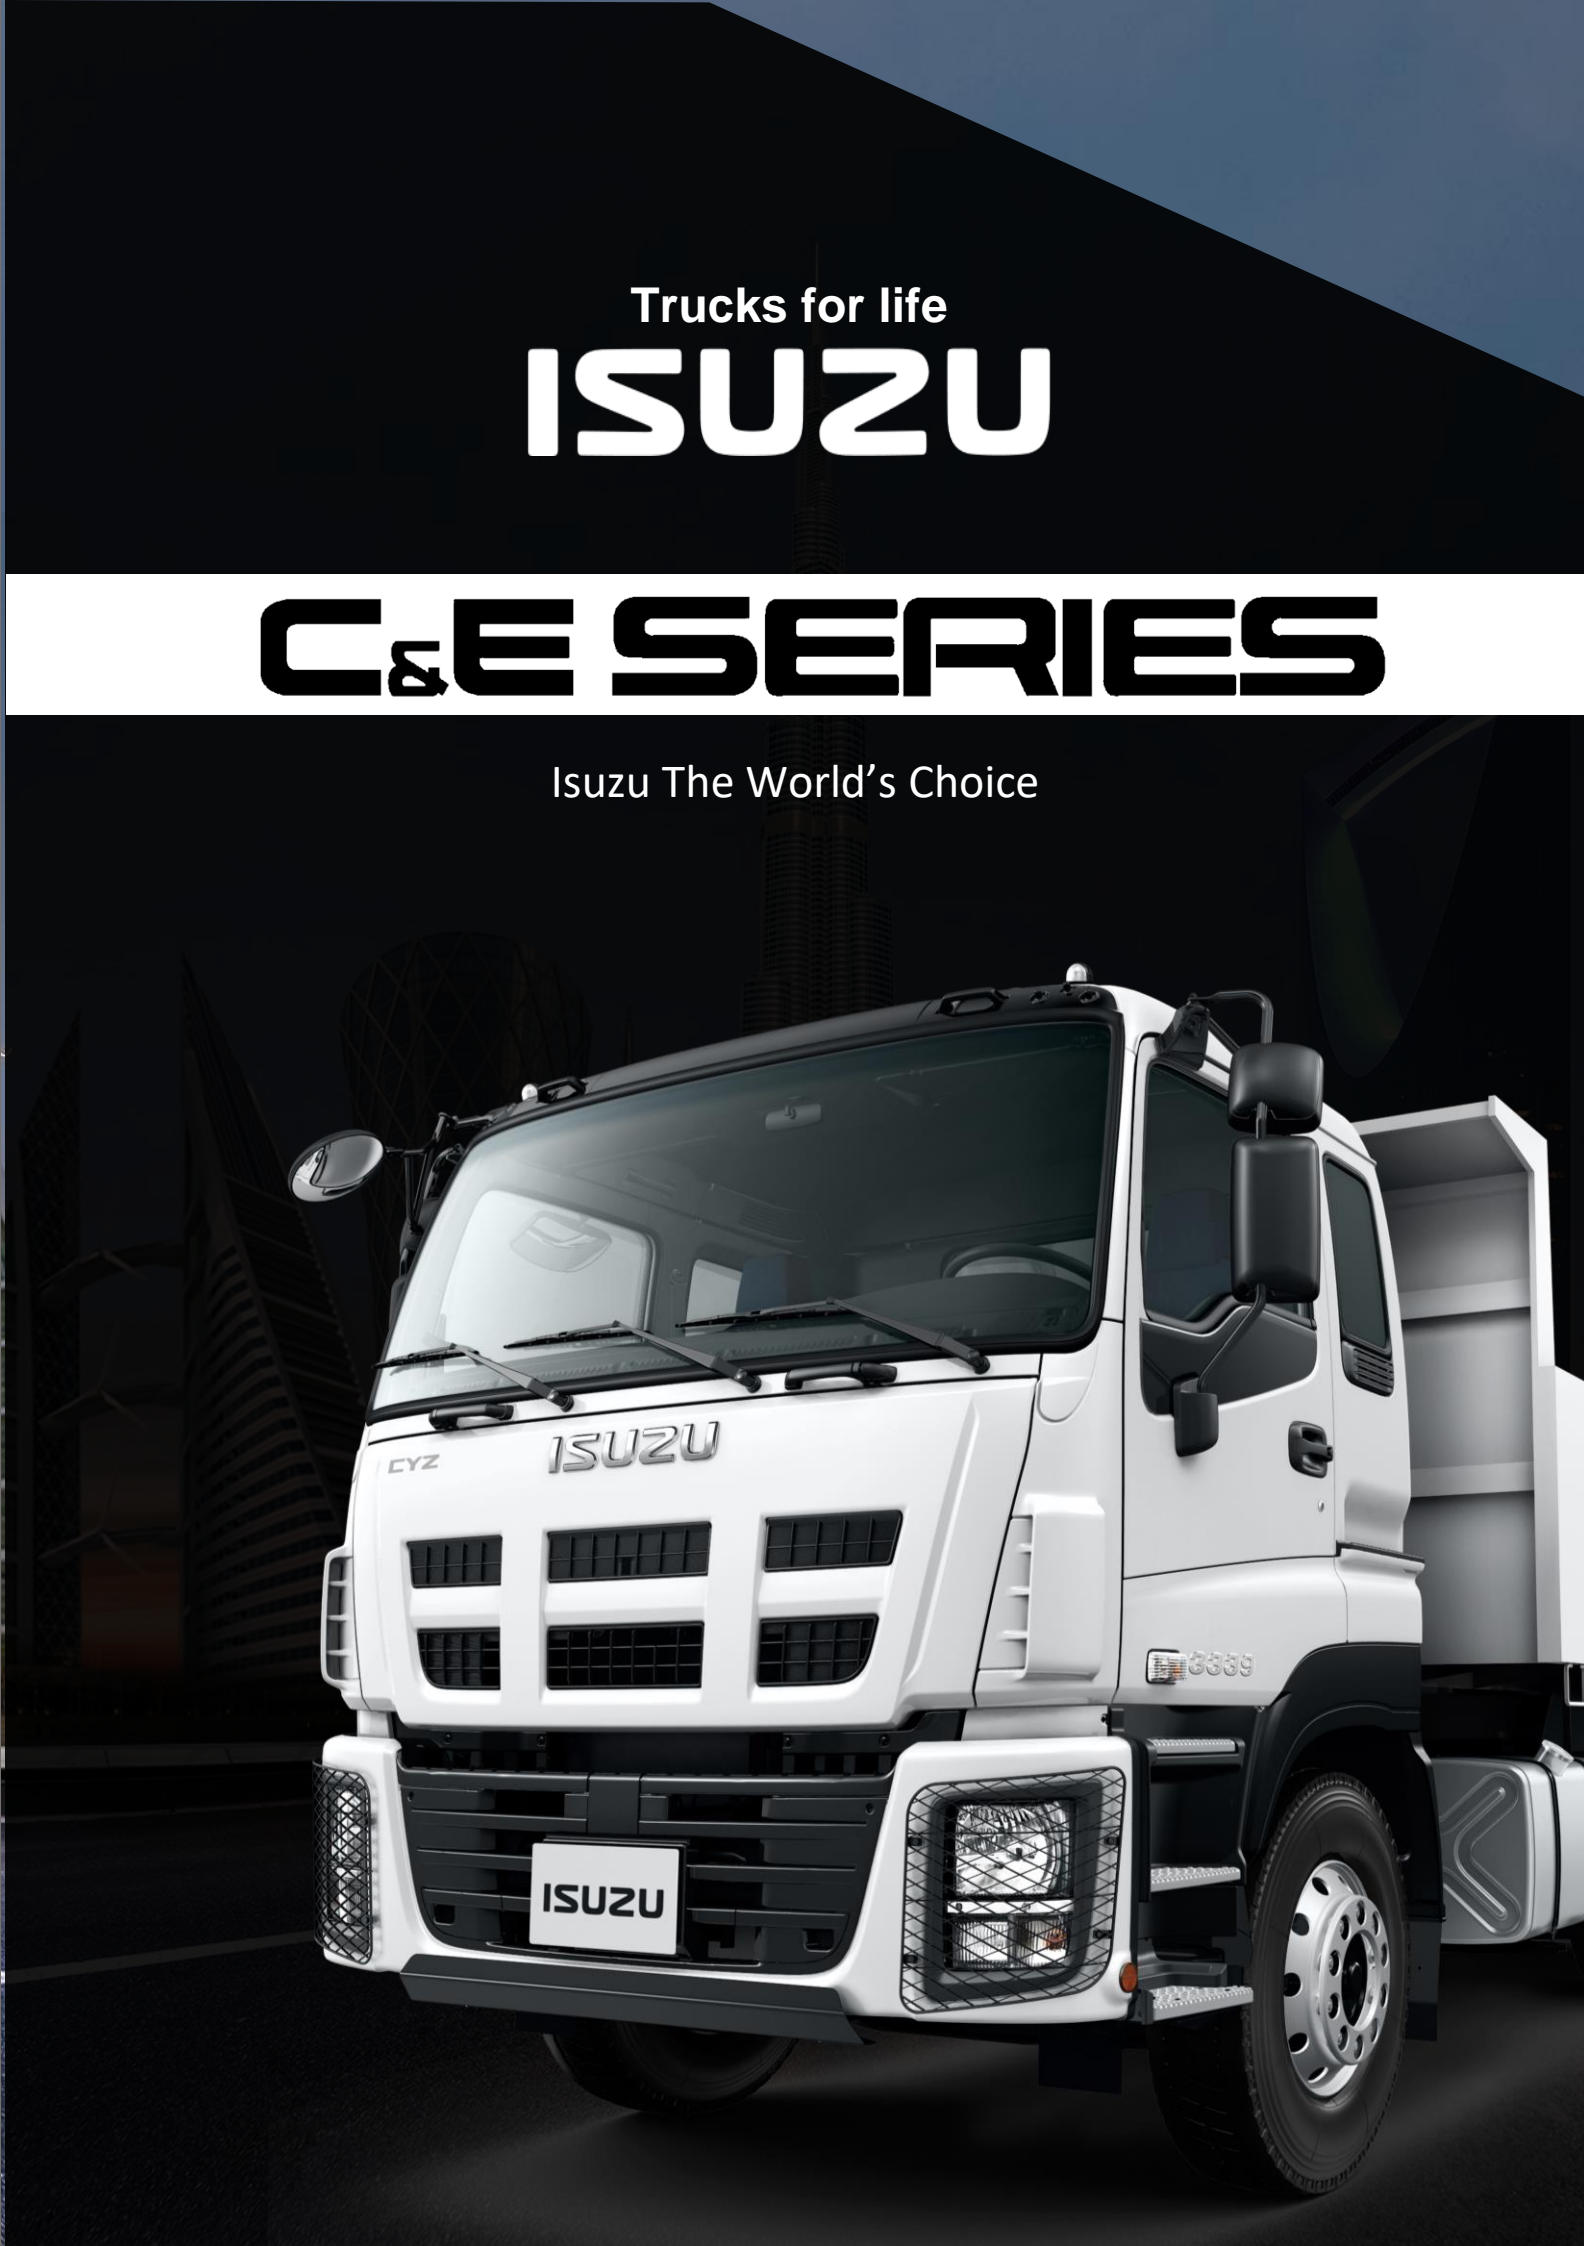

# CYZ SPECIFICATIONS

## MAIN SPECIFICATIONS

Model	CYZ51P07	CYZ51P07	CYZ51Q07
Rear Tire	Dual	Dual	Dual
G.V.W. [Kg]	28,500	28,500	28,500
Type	Cab Chassis	Cab Chassis	Cab Chassis
Seating Capacity	3	3	3

## ENGINE

Model	6WF1	6WF1	6WF1
Type	Direct Injection, Common Rail OHC, Diesel		
Emission Level	Euro II	Euro II	Euro II
No. of cylinders	6	6	6
Displacement [cc]	14,256	14,256	14,256
Max. Output [PS/rpm]	390 / 1,800	390 / 1,800	390 / 1,800
Max. Torque [Kgf·m/rpm]	190kgf · m / 1,000	190kgf · m / 1,000	190kgf · m / 1,000
Starter	24V-7.0kW	24V-7.0kW	24V-7.0kW

## MASS (kg)

Cab Chassis / Vehicle Mass	8,670	8,670	9,160

## CHASSIS

Clutch	Type	Dry Single plate		
	Size [inch]	17"	17"	17"
Transmission	Type	MJT7S	MJT7S	MJT7S
Final gear	Diameter [inch]	17.5	17.5	17.5
	Gear ratio	5.125	5.125	5.125
Brake	Type	Full Air		
	Parking	Wheel Park		
Steering	Type	Power Assist		
Axle	Front	F075	F075	F075
	Rear	RT260	RT260	RT260
Suspension		FR & RR Taper Leaf Suspension		
Frame		FR950 & RR850	FR950 & RR850	FR950 & RR850
Tire	Front & Rear	315/80R22.5-156/150K		
Disc wheel	Front & Rear	10STUD 22.5X9.00 (175-14)TC		
Fuel tank capacity [Liter]		400L	400L	400L

CYZ51Q07	CYZ51Q07	CYZ51Q07	CYZ51Q07	CYZ51Q07
Dual	Dual	Dual	Dual	Dual
28,500	28,500	28,500	28,500	28,500
Cab chassis	Cab chassis	Cab chassis	Cab chassis	Cab chassis
3	3	3	3	3

6WF1	6WF1	6WF1	6WF1	6WF1
Direct Injection, Common Rail OHC, Diesel				
Euro II	Euro II	Euro II	Euro II	Euro II
6	6	6	6	6
14,256	14,256	14,256	14,256	14,256
390 / 1,800	390 / 1,800	390 / 1,800	390 / 1,800	390 / 1,800
190kgf · m / 1,000	190kgf · m / 1,000	190kgf · m / 1,000	190kgf · m / 1,000	190kgf · m / 1,000
24V-7.0kW	24V-7.0kW	24V-7.0kW	24V-7.0kW	24V-7.0kW

9,160	9,160	9,160	9,160	9,160
-------	-------	-------	-------	-------

Dry Single Plate				
17"	17"	17"	17"	17"
MJT7S	MJT7S	MJT7S	MJT7S	MJT7S
17.5	17.5	17.5	17.5	17.5
5.125	5.125	5.125	5.125	5.125
Full Air				
Wheel Park				
Power Assist				
F075	F075	F075	F075	F075
RT260	RT260	RT260	RT260	RT260
FR & RR Taper Leaf Suspension				
FR950 & RR850	FR950 & RR850	FR950 & RR850	FR950 & RR850	FR950 & RR850
315/80R22.5-156/150K				
10STUD 22.5X9.00 (175-14)TC				
400L	400L	400L	400L	400L

# CYZ / EXR SPECIFICATIONS

## MAIN SPECIFICATIONS

Model	CYZ51T07	CYZ51T07	CYZ51T07
Rear Tire	Dual	Dual	Dual
G.V.W. [Kg]	28,500	28500	28500
Type	Cab Chassis	Cab Chassis	Cab Chassis
Seating Capacity	3	3	3

## ENGINE

Model	6WF1	6WF1	6WF1
Type	Direct Injection, Common Rail OHC, Diesel		
Emission Level	Euro II	Euro II	Euro II
No. of cylinders	6	6	6
Displacement [cc]	14,256	14,256	14,256
Max. Output [PS/rpm]	390 / 1,800	390 / 1,800	390 / 1,800
Max. Torque [Kgf·m/rpm]	190kg · m / 1,000	190kg · m / 1,000	190kg · m / 1,000
Starter	24V-7.0kW	24V-7.0kW	24V-7.0kW

## MASS (kg)

Cab Chassis / Vehicle Mass	9,410	9,410	9,410

## CHASSIS

Clutch	Type	Dry Single plate		
	Size [inch]	17"	17"	17"
Transmission	Type	MJT7S	MJT7S	MJT7S
Final gear	Diameter [inch]	17.5	17.5	17.5
	Gear ratio	5.125	5.125	5.125
Brake	Type	Full Air		
	Parking	Wheel Park		
Steering	Type	Power Assist		
Axle	Front	F075	F075	F075
	Rear	RT260	RT260	RT260
Suspension		FR & RR Taper Leaf Suspension		
Frame		FR950 & RR850	FR950 & RR850	FR950 & RR850
Tire	Front & Rear	315/80R22.5-156/150K		
Disc wheel	Front & Rear	10STUD 22.5X9.00 (175-14)TC		
Fuel tank capacity [Liter]		400L	400L	400L

CYZ51T07	EXR51F07	EXR51F07	EXR51F07
Dual	Dual	Dual	Dual
28,500	18,500	18,500	18,500
Cab chassis	Cab chassis	Cab chassis	Cab chassis
3	3	3	3

6WF1	6WF1	6WF1	6WF1
Direct Injection, Common Rail OHC, Diesel			
Euro II	Euro II	Euro II	Euro II
6	6	6	6
14,256	14,256	14,256	14,256
390 / 1,800	390 / 1,800	390 / 1,800	390 / 1,800
190kg · m / 1,000	190kg · m / 1,000	190kg · m / 1,000	190kg · m / 1,000
24V-7.0kW	24V-7.0kW	24V-7.0kW	24V-7.0kW

9,410	6,835	6,835	6,835

Dry Single Plate			
17"	17"	17"	17"
MJT7S	MJT7S	MJT7S	MJT7S
17.5	18.5	18.5	18.5
5.125	5.125	5.125	5.125
Full Air			
Wheel Park			
Power Assist			
F075	F075	F075	F075
RT260	R130	R130	R130
FR & RR Taper Leaf Suspension			
FR950 & RR850	FR950 & RR850	FR950 & RR850	FR950 & RR850
315/80R22.5-156/150K			
10STUD 22.5X9.00 (175-14)TC			
400L	550L	550L	550L

# BUILT TO MOVE

## C-SERIES Rigid Trucks E-SERIES Tractor Head


- EXCELLENT DURABILITY**
- BIGGER PAYLOAD CAPACITY**
- SAFETY**
- CONVENIENCE**



Unit:mm

MODEL	CYZ51P07	CYZ51P07	CYZ51Q07	CYZ51Q07	CYZ51Q07	CYZ51Q07	CYZ51Q07	CYZ51Q07
REAR TIRE	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual
TYPE	Cab chassis	Cab chassis	Cab chassis	Cab chassis	Cab chassis	Cab chassis	Cab chassis	Cab chassis
OAL	8315	8315	9775	9775	9775	9775	9775	9775
OW	2490	2490	2490	2490	2490	2490	2490	2490
AW	2045	2045	2045	2045	2045	2045	2045	2045
CW	1850	1850	1850	1850	1850	1850	1850	1850
BW	2520	2520	2520	2520	2520	2520	2520	2520
FOH	1400	1400	1400	1400	1400	1400	1400	1400
WB	4,180+1,370	4,180+1,370	4,565+1,370	4,565+1,370	4,565+1,370	4,565+1,370	4,565+1,370	4,565+1,370
ROH (Frame end)	1365	1365	2440	2440	2440	2440	2440	2440
CA	4209	4209	4594	4594	4594	4594	4594	4594
CE	6259	6259	7719	7719	7719	7719	7719	7719
OH	3540	3540	3540	3540	3540	3540	3540	3540
FR Axle to cab end	656	656	656	656	656	656	656	656

MODEL	CYZ51T07	CYZ51T07	CYZ51T07	CYZ51T07	EXR51F07	EXR51F07	EXR51F07
REAR TIRE	Dual	Dual	Dual	Dual	Dual	Dual	Dual
TYPE	Cab chassis	Cab chassis	Cab chassis	Cab chassis	Cab chassis	Cab chassis	Cab chassis
OAL	11250	11250	11250	11250	5970	5970	5970
OW	2490	2490	2490	2490	2490	2490	2490
AW	2045	2045	2045	2045	2045	2045	2045
CW	1850	1850	1850	1850	1850	1850	1850
BW	2520	2520	2520	2520	2520	2520	2520
FOH	1400	1400	1400	1400	1400	1400	1400
WB	5,295+1,370	5,295+1,370	5,295+1,370	5,295+1,370	3600	3600	3600
ROH (Frame end)	3185	3185	3185	3185	970	970	970
CA	5324	5324	5324	5324	2944	2944	2944
CE	9194	9194	9194	9194	3914	3914	3914
OH	3540	3540	3540	3540	3510	3510	3510
FR Axle to cab end	656	656	656	656	656	656	656

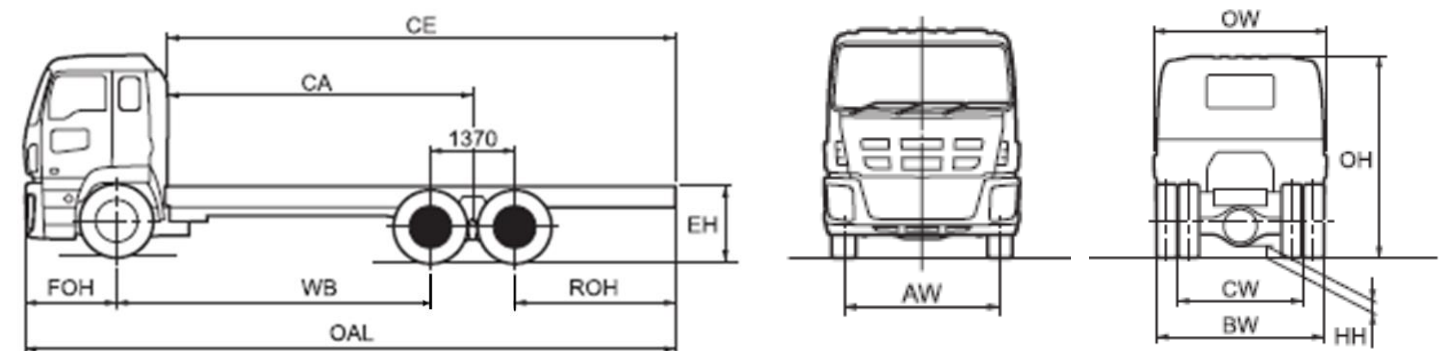



**ISUZU MOTORS INTERNATIONAL FZE**  
S50909 Jebel Ali Free Zone, P.O.Box 263188  
Dubai, United Arab Emirates

ISUZU MOTORS LIMITED reserves the right to change specifications and equipment without notice.  
Details of specifications and equipment are also subject to change to meet local conditions and government requirements.  
Please inquire at your local ISUZU representative for more complete details of any such changes that may be required.